

---

Installation Instructions >> Pannier Racks >> Kawasaki KLR 650

---



---

Installation Instructions >> Pannier Racks >> Kawasaki KLR 650

---

1. Remove the factory bolt from the passenger handle and replace it with our supplied M8 Allen bolt. Mount the right side pannier rack. Leave it loose.



2. Remove the upper foot peg mount bolt and replace it with our supplied M8 Allen bolt while securing the front mount of the pannier rack. Leave it loose.



---

3. Repeat step 1. on the left side.



4. Repeat step 2. on the left side.



---


## Installation Instructions >> Pannier Racks >> Kawasaki KLR 650

---

5. Mount the rear cross brace.




6. Add all four M6 hex bolts, washers and locking nuts.

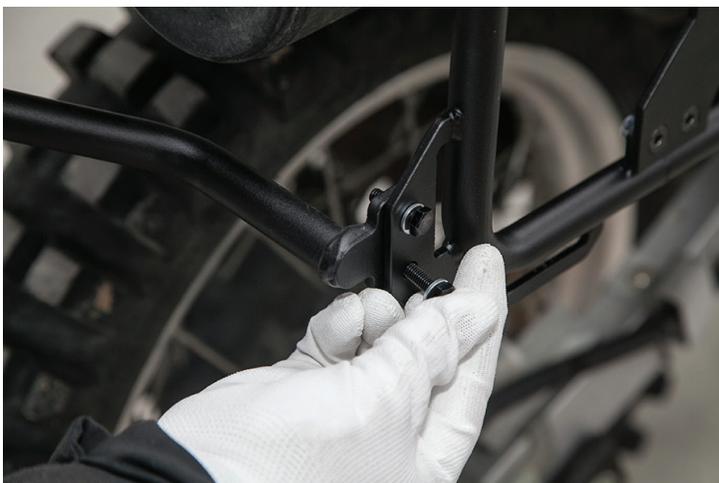

---

7. Tighten the front mounting bolts on both sides using a M6 Allen key.

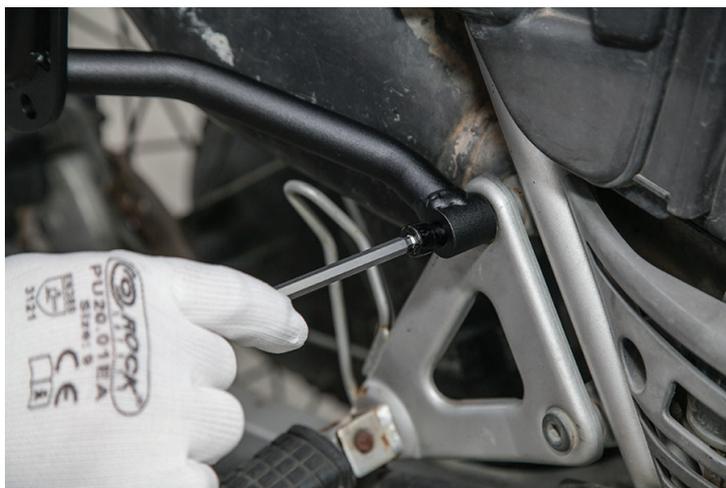

8. Tighten the upper mounting bolts on both sides using a M6 Allen key.



---

## Installation Instructions >> Pannier Racks >> Kawasaki KLR 650

---

9. Using a 10mm socket and ratchet on one side while holding down on the other with a 10mm ratchet tighten the bolts and nuts on the rear cross brace.



10. Check that all bolts and nuts have been tightened. Double-check again after a test ride.



# Kawasaki KLR 650 Pannier Racks

## Hardware Kit and Recommended Tools

---



1. 2x M8x70mm Allen bolts+washers
2. 2x M8x50mm Allen bolts+washers
3. 4x M6x16mm hex head bolts+washers  
+locking nuts
4. 10mm wrench
5. Ratchet
6. 6mm Allen key
7. 10mm socket